

**CONTACTUM**

meet the

# 17th edition

with Contactum

As one of the UK's major manufacturers of installation equipment, we aim to give you the solutions to the challenges of making your installation to the 17th Edition of the Wiring Regulations.


Not quite what you are looking for; our manufacturing and design facility can provide you with any solution to suit your needs.



80A RCDs fitted as standard

## Possible arrangements

100A isolator controlling all circuits  
Up to 4 outgoing RCBOs or MCBs  
2 **80A** 30mA RCDs each controlling up to 6 MCBs

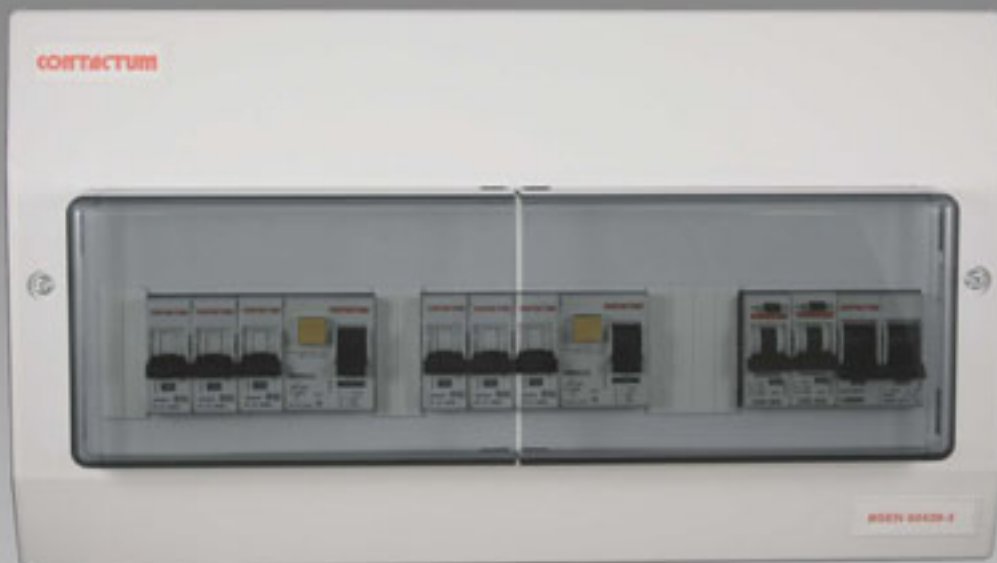


## Contactum dual RCD split load consumer units

Uses a flexible configuration to provide the optimal combinations of RCDs to protect group circuits, with circuits having individual RCBO or MCB protection


## Contactum RCD split load consumer units

Uses a flexible configuration to provide the optimal combinations of RCD protected circuits, with circuits with individual RCBO or MCB protection

### PS12/80/80

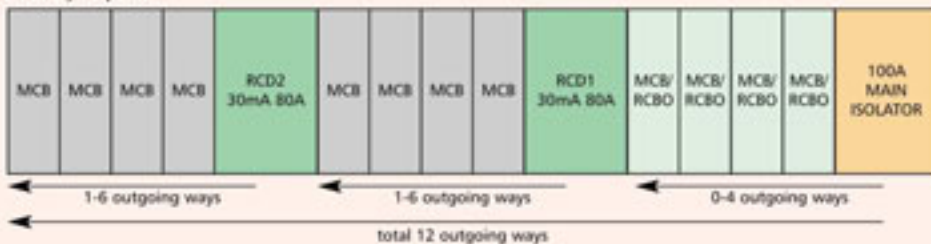


### PS10/80N

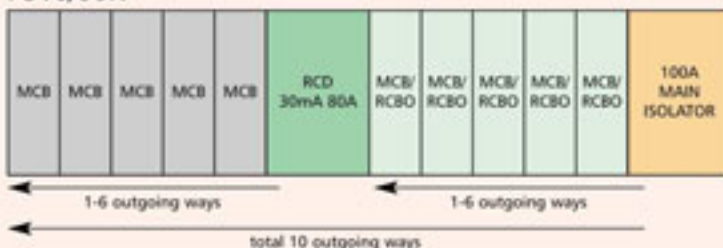

**CONTACTUM**

meet the  
**17th edition**  
 with Contactum

## Order references

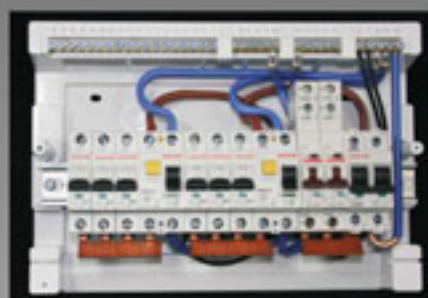

PS8/80/80

### Contactum Consumer Units

- ◆ Designed and manufactured in London
- ◆ Tested to BSEN 60947-3
- ◆ Available in metal construction
- ◆ Tested in our accredited UKAS Test House
- ◆ Generous cabling space
- ◆ Secure 3 point fixing
- ◆ All devices lockable off
- ◆ Full range of command and control devices available
- ◆ 3 year guarantee on all consumer units

To order now contact our sales department:

Tel: 020 8208 7419

Fax: 020 8208 3340

Email: [sales@contactum.co.uk](mailto:sales@contactum.co.uk)

17TH

### Surface insulated dual split load consumer units

	Isolator	RCD1	RCD2	Total MCB ways	Dimensions (mm) HxWxD
PS8/80/80	100A	80A 30mA	80A 30mA	8	232x330x90
PS12/80/80	100A	80A 30mA	80A 30mA	12	232x396x90

### Surface insulated split load consumer units

	Isolator current rating	30mA RCD current rating	Total MCB ways	Total RCD ways	Dimensions (mm) HxWxD
PS6/63N	100A	63A	6	1 to 4	232x261x90
PS10/63N	100A	63A	10	3 to 6	232x330x90
PS10/80N	100A	80A	10	3 to 6	232x330x90
PS14/63N	100A	63A	14	5 to 8	232x396x90
PS14/80N	100A	80A	14	5 to 8	232x396x90

### Surface insulated consumer units with isolator

	Isolator current rating	Total MCB ways	Dimensions HxWxD
P1N	63A	1	130x85x66
P2N	63A	2	228x120x100
P4N	80A	4	232x190x90
P6N	100A	6	232x226x90
P8N	100A	8	232x261x90
P12N	100A	12	232x330x90
P16N	100A	16	232x396x90

#### MCB

Current rating	SP type B
6A	71068
10A	71108
16A	71168
20A	71208
32A	71328
40A	71408
50A	71508
Blanks	9000

#### RCBO

SW phase solid neutral	
90603SP/B	
91003SP/B	
91603SP/B	
92003SP/B	
93203SP/B	
94003SP/B	
Padlocking available for all devices. 9001 (padlock not supplied)	



Dedicated accessories are available with printed legends. Please contact us for a comprehensive list.